



Dry-Type Cast Resin
Transformer

PRODUCT CATALOG

COMPANY HISTORY



QTC Energy Public Company Limited is Thailand's leading manufacturer and supplier of distribution transformer. QTC was established since 1996. QTC Dry-type Cast Resin Transformers are made from Coil Kits form OEM factory in Europe.

The OEM Factory of the Coil Kits is a certied company for the Quality Management according to ISO 9001:2015, as well as the Environmental Management according to ISO 14001:2015, ISO 45001:2018 and also have passed stringent Short Circuit Withstand test and E2, C2, F1 conducted by CERSI and Labein. Normally, our transformer are designed for the ambient temperature of 40°C. Temperature rise of winding is 100 K QTC cast resin transformers are made in compliance to the IEC, ANSI and other standards to meet all requirements in Thailand.



ISO 9001:2015



ISO 14001:2015



ISO 45001:2018

WHY CHOOSE DRY-TYPE CAST RESIN TRANSFORMER



Highly Secure Transformer

By its construction and constituents, the cast resin transformer is a frame retardant electrical device. CRT will provide you maximum safety, with the least fire protection around, therefore keeping you away from severe damages and fatalities.



Maintenance-Free

Due to its inherent design, constituents and its construction, the maintenance of Cast Resin Transformer reduces to a visual check and some air for dusting. The absence of oil plus a hermetically sealed windings reduce your maintenance cost to virtually zero.



No Extra Civil Works

Unlike its oil counterpart, the CRT Transformer requires no oil slumps, no fixing and placement restrictions, no fire barrier. In all, it requires no civil works, thus allowing you to place your transformer very close to the load saving you a lot in terms of cablings transmission loss.



Power increased by Air forced Cooling

The power reserves of CRT are far greater than the Oil Transformers. Another advantage is that the power capacity can be increased by simply adding fans for an AF (Air Forced cooling) operation thus obtaining up to 25% to 40% power increase.



High Reliability

Since introduction the CRT have served most demand and complex applications, with a minimal failure rate. The reliability figures for CRT has shown better than the Oil Transformers, by the testimony and reports of international consulting and surveying companies.





Unforgiving Environment

If properly designed for different environmental, climatic and fire classes. You can rest assured that your CRT will outperform wherever other transformers type have long stopped operating.


PRODUCTION PROCESS

DRY-TYPE TRANSFORMER | MV & LV WINDING SECTIONS



Multi-Step Lap Core

- Reduced no-load loss up to 15%
- Decreased noise level up to 5dB



High Voltage (HV) Foil Discs Type Winding

- Aluminium or Copper Conductors
- Optimum Dielectric Strength
- Excellent Short Circuit Withstand



Cast Resin Vacuum Plant

- Casting HV Coil under vacuum for Class F
- Three step for mix the components (filler, hardener, resin, alumina)



Low Voltage (LV) Foil Winding

- Aluminium or Copper Conductors
- Excellent Short Circuit Withstand
- Resistant to contamination



Soaking Sytem

- Soak LV Coil under vacuum



HV & LV Coil Assembly



Completed Transformer

TESTING

ELECTRIC TESTING LABORATORY



Routine Test

The modern testing facilities allow to perform the test and check the results in accordance with the standard (IEC60076-11) the following routine test are performed in all the transformers:

- Measurement of winding resistance
- Measurement of voltage ratio and check of phase displacement
- Measurement of no-load loss and current at 100% of rated voltage
- Measurement of short circuit impedance and load loss
- Measurement of partial discharges
- Dimensional control
- Dielectric routine test:
 - Applied voltage test
 - Inducted voltage withstand test



Type Test

On request and accordance with the customer

- Full wave lightning impulse test
- Temperature rise test




Special Test

On request and accordance with the customer

- Measurement of zero-sequence impedance
- Measurement of no load current harmonics
- Determination of sound level

DIMENSION

DRY-TYPE CAST RESIN TRANSFORMER DATA SHEET FOR STANDARD LOSSES (ALUMINIUM CONDUCTOR)

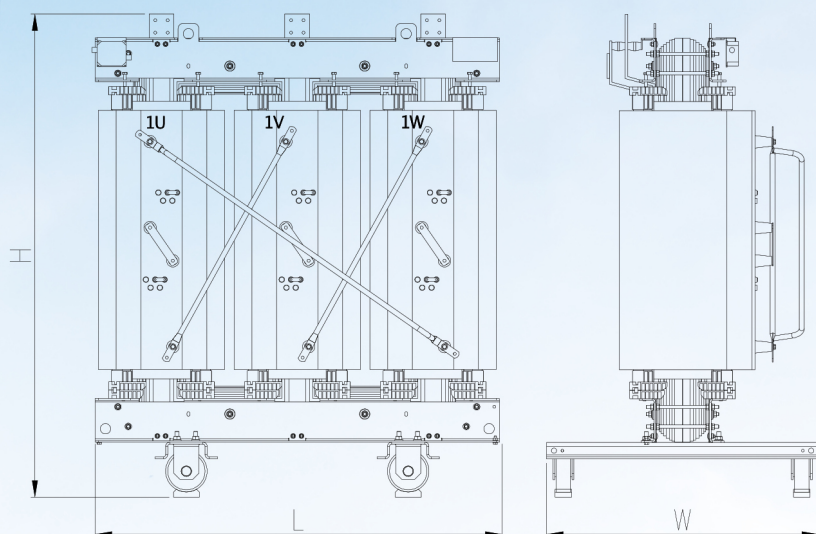

STANDARD

In accordance with standard
IEC 60076-11//EN 50541-2011
E2 C2 F1 // CLASS F

COMMON ELECTRICAL CHARACTERISTICS

| | |
|-----------------------------|---|
| Frequency | 50 Hz |
| Vector group | Dyn11 or Dyn5 |
| Primary voltage | Up to 36 kv |
| HV tapping range (off-load) | 5 positions |
| Secondary voltage | 380 to 416V (Ph-Ph) 220 to 240V (Ph-N) |
| Ambient temperature (Max) | 40 °C |
| Attitude above sea level | < 1000 m |
| Routine test | Included |
| Type test | Optional |
| Special test | Optional |

TRANSFORMER DIMENSION

Voltage System 22kV & 24kV

| Rating Power (kVA) | No load Losses (W) | Load Losses (W) | | Imp. (%) | Transformer Dimensions & Weight | | | | Sound Level dB (A) | Enclosure Type |
|--------------------|--------------------|-----------------|----------|----------|---------------------------------|-------------|--------------|--------------|--------------------|----------------|
| | | at 120 °C | at 75 °C | | Length (mm.) | Width (mm.) | Height (mm.) | Weight (kg.) | | |
| 500 | 1400 | 6600 | 5800 | 6 | 1490 | 850 | 1640 | 1680 | 56 | Type 1 |
| 630 | 1650 | 7600 | 6600 | 6 | 1520 | 850 | 1690 | 1900 | 56 | Type 1 |
| 800 | 2000 | 9400 | 8150 | 6 | 1580 | 850 | 1790 | 2250 | 57 | Type 1 |
| 1000 | 2300 | 11000 | 9550 | 6 | 1660 | 1000 | 1910 | 2600 | 59 | Type 2 |
| 1250 | 2800 | 13000 | 11300 | 6 | 1730 | 1000 | 2030 | 3150 | 61 | Type 2 |
| 1600 | 3100 | 16000 | 13900 | 6 | 1790 | 1000 | 2150 | 3700 | 61 | Type 3 |
| 2000 | 4000 | 18000 | 15650 | 6 | 1820 | 1310 | 2420 | 4500 | 63 | Type 4 |
| 2500 | 5000 | 23000 | 20000 | 6 | 2060 | 1310 | 2460 | 5500 | 65 | Type 4 |

Voltage System 12/24kV.


| Rating Power (kVA) | No load Losses (W) | Load Losses (W) | | Imp. (%) | Transformer Dimensions & Weight | | | | Sound Level dB(A) | Enclosure Type |
|--------------------|--------------------|-----------------|----------|----------|---------------------------------|-------------|--------------|--------------|-------------------|----------------|
| | | at 120 °C | at 75 °C | | Length (mm.) | Width (mm.) | Height (mm.) | Weight (kg.) | | |
| 500 | 1400 | 6600 | 5800 | 6 | 1520 | 850 | 1675 | 1715 | 56 | Type 1 |
| 630 | 1650 | 7600 | 6600 | 6 | 1550 | 850 | 1725 | 1940 | 56 | Type 1 |
| 800 | 2000 | 9400 | 8200 | 6 | 1615 | 850 | 1825 | 2295 | 57 | Type 1 |
| 1000 | 2300 | 11000 | 9600 | 6 | 1995 | 1000 | 1950 | 2655 | 59 | Type 2 |
| 1250 | 2800 | 13000 | 11400 | 6 | 1765 | 1000 | 2070 | 3215 | 61 | Type 2 |
| 1600 | 3100 | 16000 | 14000 | 6 | 1825 | 1000 | 2195 | 3780 | 61 | Type 3 |
| 2000 | 4000 | 18000 | 15700 | 6 | 1860 | 1310 | 2470 | 4590 | 63 | Type 4 |
| 2500 | 5000 | 23000 | 20100 | 6 | 2100 | 1310 | 2510 | 5610 | 65 | Type 4 |

Voltage System 33kV.

| Rating Power (kVA) | No load Losses (W) | Load Losses (W) | | Imp. (%) | Transformer Dimensions & Weight | | | | Sound Level dB(A) | Enclosure Type |
|--------------------|--------------------|-----------------|----------|----------|---------------------------------|-------------|--------------|--------------|-------------------|----------------|
| | | at 120 °C | at 75 °C | | Length (mm.) | Width (mm.) | Height (mm.) | Weight (kg.) | | |
| 500 | 1900 | 6450 | 5600 | 6 | 1760 | 850 | 1915 | 2280 | 56 | Type 2 |
| 630 | 2200 | 7500 | 6500 | 6 | 1820 | 850 | 2040 | 2600 | 56 | Type 2 |
| 800 | 2700 | 9000 | 7800 | 6 | 1890 | 850 | 2100 | 3000 | 57 | Type 2 |
| 1000 | 3100 | 11000 | 9550 | 6 | 1910 | 1000 | 2240 | 3400 | 58 | Type 3 |
| 1250 | 3600 | 13000 | 11300 | 6 | 2030 | 1000 | 2350 | 4150 | 60 | Type 3 |
| 1600 | 4200 | 16000 | 13900 | 6 | 2130 | 1000 | 2410 | 4850 | 61 | Type 5 |
| 2000 | 5000 | 18500 | 16100 | 6 | 2200 | 1310 | 2630 | 5900 | 62 | Type 6 |
| 2500 | 5800 | 22500 | 19550 | 6 | 2290 | 1310 | 2730 | 6700 | 65 | Type 7 |

E &

| Enclosure Type | Dimensions | | | Weight (Kg.) |
|----------------|-------------|--------------|--------------|--------------|
| | Width (mm.) | Length (mm.) | Height (mm.) | |
| Type 1 | 1400 | 2000 | 2200 | 550 |
| Type 2 | 1600 | 2400 | 2400 | 750 |
| Type 3 | 1800 | 2600 | 2600 | 880 |
| Type 4 | 2000 | 2600 | 2600 | 930 |
| Type 5 | 1800 | 2700 | 2700 | 940 |
| Type 6 | 2000 | 2800 | 2900 | 1060 |
| Type 7 | 2000 | 2900 | 3000 | 1100 |

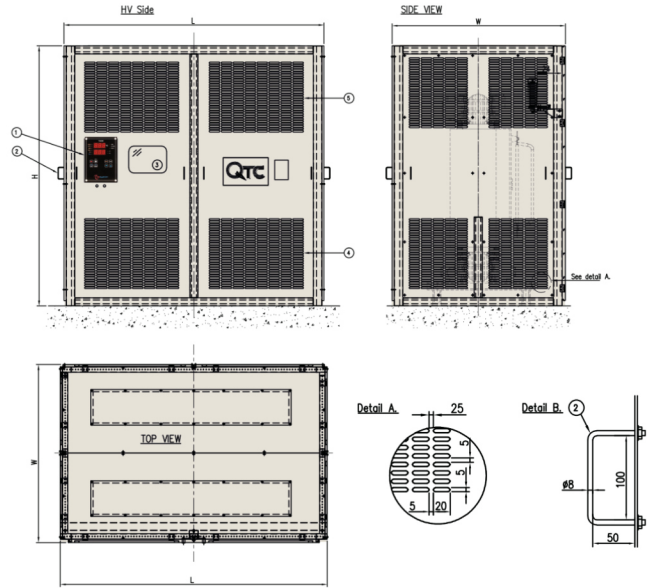

SA

- Temperature Control Unit, with three change-over dry contacts (for alarm, trip and fault)
- PT100 for each LV winding
- Cross-flow fans (AF up 25% or 40%)
- Bi-directional wheels for the transformer

- IP31 Enclosure
- Lifting lugs for transformer
- Rating plate
- Lightning arrester

DT



"Quality of Details"



HEAD OFFICE

2/2 Soi Krungthep Kritha 8 (5), Krungthep Kritha Rd.,
Huamark, Bangkok, Bangkok 10240

Sale Contact: (66) 65-539-5162
Tel: (66) 2379 3089-92 Fax: (66) 2379-3097
Hotline: (66) 89-444-0844
E-mail: contact@qtc-energy.com



FACTORY

149 M.2, Tambol Mabyangporn,
Ampur Pluakdaeng,
Rayong 21140 Thailand

Tel: (66) 3889-1411-3
Fax: (66) 3889-1420, 3889-1595



WEBSITE :
www.qtc-energy.com



FACEBOOK :
QTC Energy PCL.



LINE :
@qtc_energy